

Operation Instructions

Three-position LED Key Switch



Make your choice.....



1 Safety Instruction

 Thanks for your purchasing, please refer to the following before using.

2 Overview

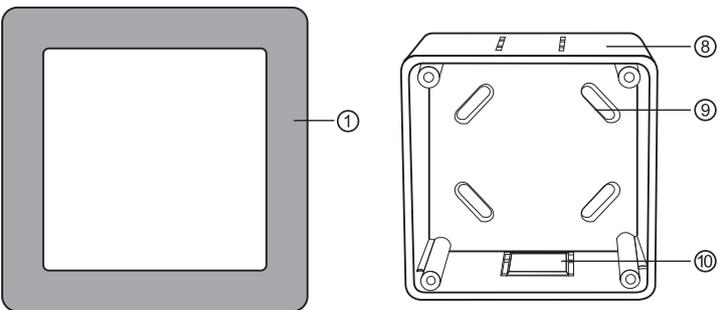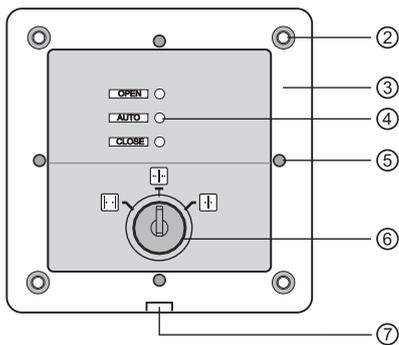

- ① Stainless steel front cover
- ② Fixing screw × 4(bottom)
- ③ Main panel
- ④ Indicator light
- ⑤ Fixing magnet × 4(panel)
- ⑥ Function key
- ⑦ Detachable hole
- ⑧ Bottom case
- ⑨ Fixing screw holes × 4
- ⑩ Wiring holes × 3


3 Feature

- Switching setting by key, it is convenient to control three function commands of open, automatic and close of automatic door.
- The key rotation is excellent, and the function switching is easy to operate.
- The lock cylinder lock sleeve is made by new technology, with stable force and lasting elasticity of the lock spring.
- 86 type switch panel design, equipped with a special bottom case, easy to install on various occasions.
- The latest magnetic metal panel appearance more refined and fashionable.

4 Function


 **OPEN**

Full Open: Handling, temporary ventilation and emergency period
The internal and external sensors and access control devices all invalid, and the automatic door remains fully open state and does not close back.




 **AUTO**

Automatic: During normal business hours
Internal and external sensor are effective, when received sensing signal, door will be opened automatically.




 **CLOSE**

NORMALLY CLOSE: Night or need to close time period
All sensors are invalid, door control system is locked automatically. Automatic door in the closing state. All people can not enter and exit competly.



5 Wiring

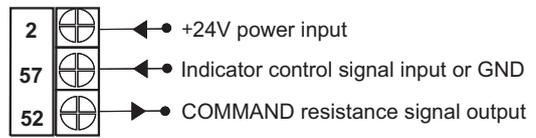

6 Parameters

Input Power	DC24V
Mechanical working life	over 75000 times
Functions	3 positions
Hole Dimension	85×85×43mm