




1 Safety Instruction

! Thanks for your purchasing, please refer to the following before using.

2 Over-all Character

- This product is unidirectional command switch for automatic door accessory using. Manually issue automatic/exit/lock/open/partial instructions to switch functions.
- With TFT true Color 2.8 Inch Displaying Screen, corresponding instruction visually on different occasion.
- Operation of function switch can be with/without Password
- With 86 size panel design, easy for installation.

3 Over-view

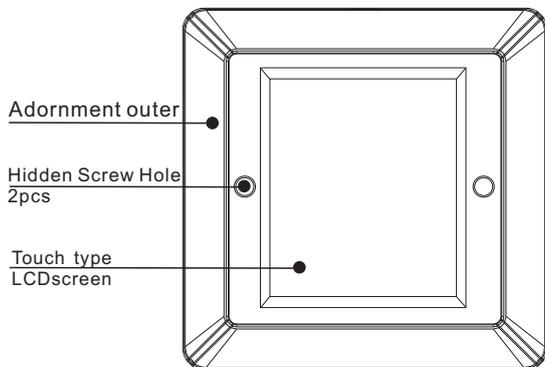

4 Function switch

Power on, displaying Loading... 3 2 1

After starting, enter into standby system.
No operation within 3S will displays screen protection.

Under standby system: With & without password operation.







1. With password operation: touch the LCD screen, to display the current model. and then enter password window.(Input* to delete wrong password)

2. Without password operation: touch the LCD screen, to enter function switch system directly.

Input correct password to enter function switch system.

Enter function switch system, choose the function which needed and press OK to confirm.Or Press CANCEL to return.


The controller will output corresponding Resistivity ,screen display corresponding function and get back to standby system within 2S.

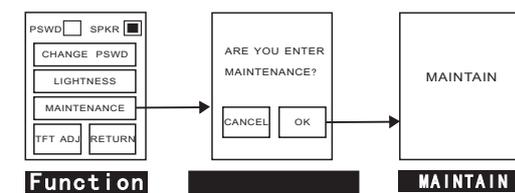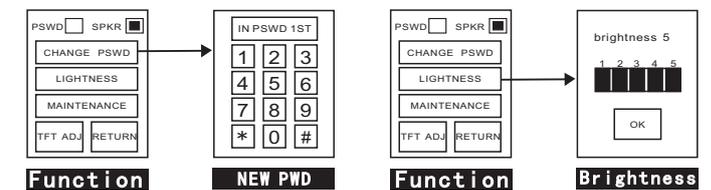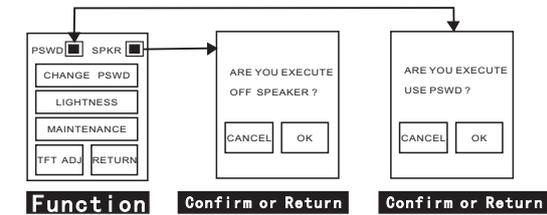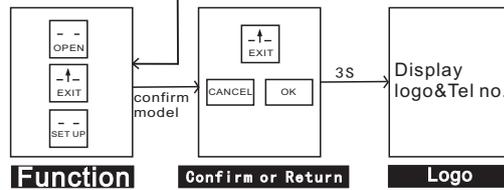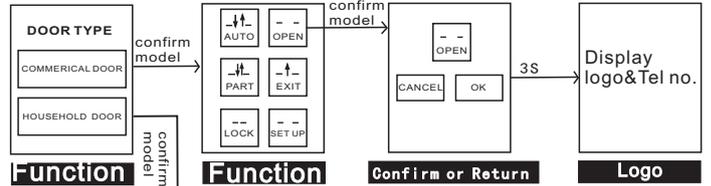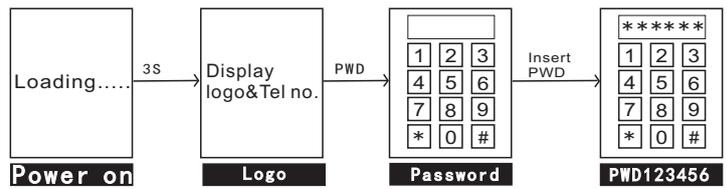

5 Dial switch setting

- ① NO TEL NO. displaying: Make the dial switch 1 to position 1. Standby system with Tel no.
- ② NO Tel No. displaying: Make the dial switch 1 to NO position, standby system without tel no.

6 Wiring



7 Parameters

- Input voltage: DC12-28V
- Function switch: 5 ranges
- Apperance: 86*86(panel)
- Display Screen: TFT True Color 15*45mm
- Electric current less than 53 mA
- Touch screen 2.8 inch